
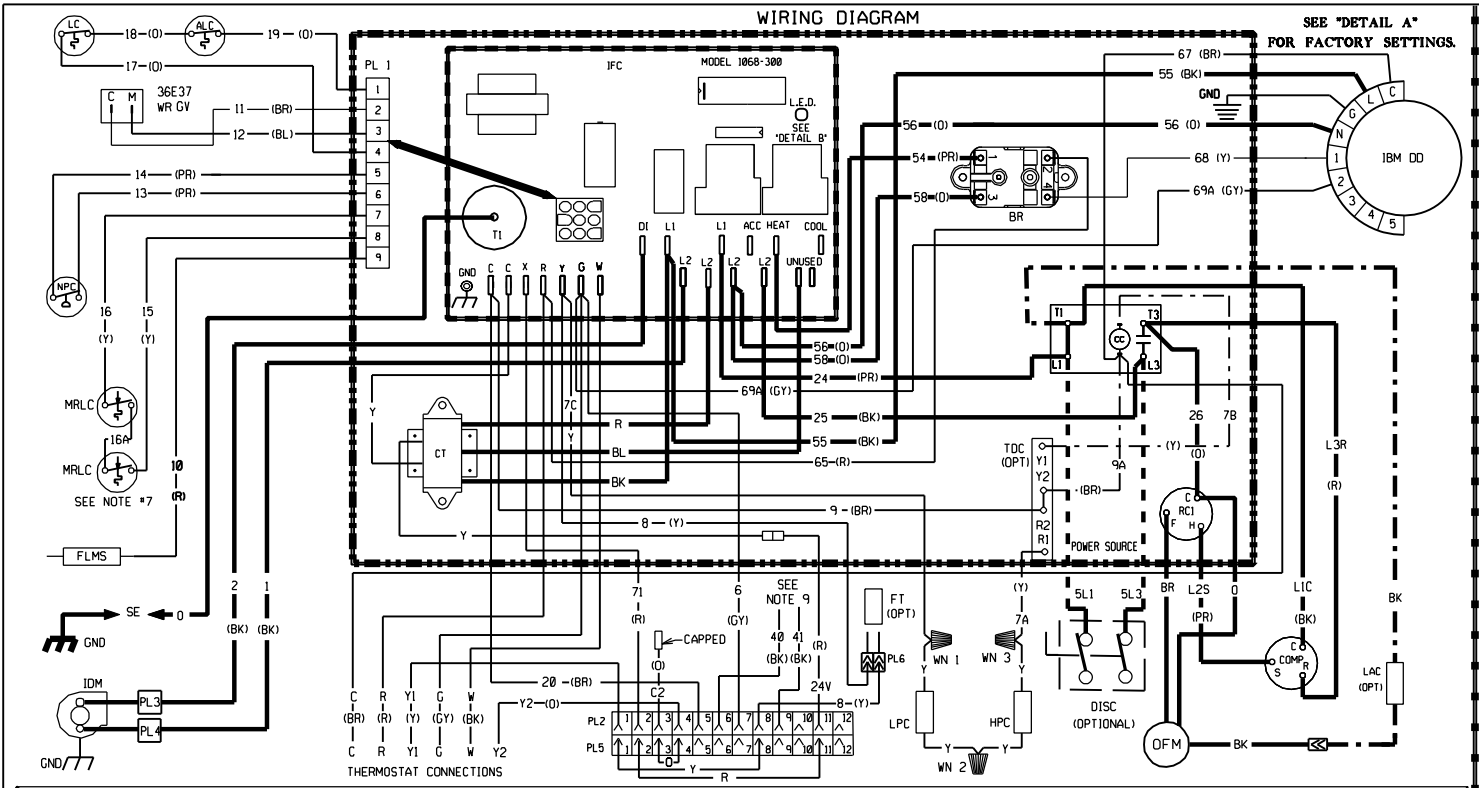


NOMINAL COOLING CAPACITY	MOTOR SPEED FROM FACTORY HEAT	MOTOR SPEED FROM FACTORY COOL	AVAILABLE SPEEDS
3 TON	80K MED (TAP 3)	LOW (TAP 2)	LOW (TAP 1)
	120K HIGH (TAP 4)		LOW /W DELAY (TAP 2)
			MED (TAP 3)
			HIGH (TAP 4)
3.5 TON	80K MED (TAP 3)	MED (TAP 2)	LOW (TAP 1)
	120K HIGH (TAP 4)		MED /W DELAY (TAP 2)
			MED (TAP 3)
			HIGH (TAP 4)
4 TON	80K LOW (TAP 1)	MED (TAP 2)	LOW (TAP 1)
	100K MED (TAP 2)		MED /W DELAY (TAP 2)
	135K HIGH (TAP 4)		MED (TAP 3)
			HIGH (TAP 4)
5 TON	100K LOW (TAP 1)	MED (TAP 2)	LOW (TAP 1)
	135K HIGH (TAP 3)		MED /W DELAY (TAP 2)
			HIGH (TAP 3)

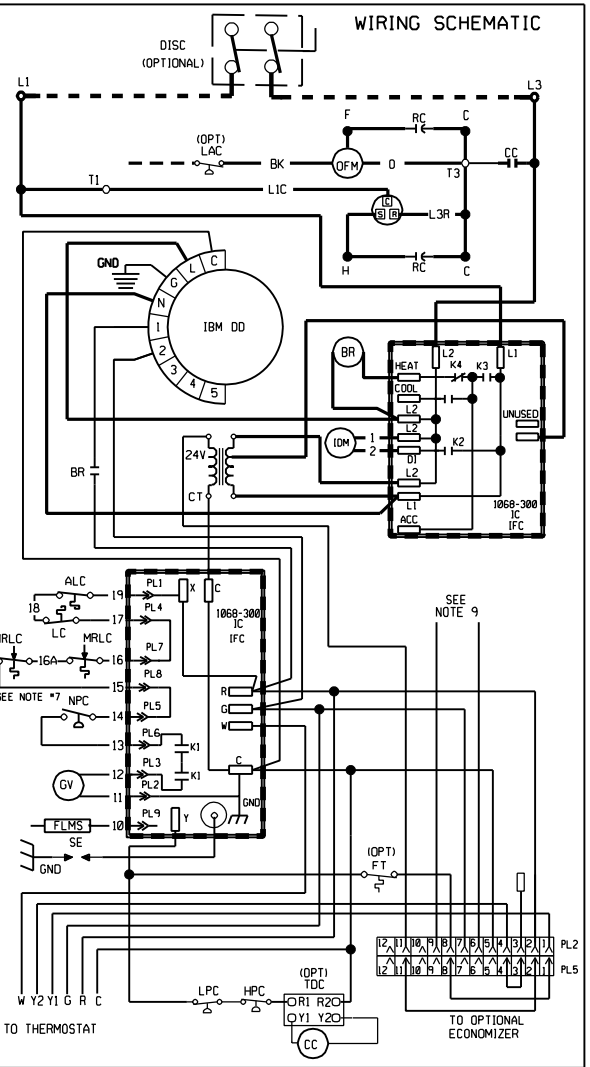

COMPONENT CODE

ALC	AUX. LIMIT CONTROL	MRLC	MANUAL RESET LIMIT CONTROL
BR	BLOWER RELAY	NPC	NEGATIVE PRESSURE CONTROL
CC	COMPRESSOR CONTACTOR	OFM	OUTDOOR FAN MOTOR
COMP	COMPRESSOR	PL	PLUG
CT	CONTROL TRANSFORMER	RC	RUN CAPACITOR
DISC	DISCONNECT SWITCH	SE	SPARK ELECTRODE
FLMS	FLAME SENSOR	TDC	TIME DELAY CONTROL
FT	FREEZE STAT	WN	WIRE NUT
GL	GROUND LUG		
GND	GROUND		
GV	GAS VALVE		
HPC	HIGH PRESSURE CONTROL		
IBM	INDOOR BLOWER MOTOR DIRECT DRIVE		
IDM	INDUCED DRAFT MOTOR		
IFC	INTERGRATED FURNACE CONTROL		
LAC	LOW AMBIENT COOLING CONTROL		
LC	LIMIT CONTROL		
LPC	LOW PRESSURE CONTROL		

NOTES:

1. CONNECTORS SUITABLE FOR USE WITH COPPER CONDUCTORS ONLY.
2. COMPRESSOR MOTOR THERMALLY PROTECED. ALL 3 PHASE MODELS ARE PROTECTED UNDER PRIMARY SINGLE PHASE CONDITIONS.
3. CONTROL TRANSFORMER PRIMARY LEADS: RED-COMMON, BLUE-208V, BLACK-230V. TRANSFORMER FACTORY WIRED FOR 230 VOLTS. INTERCHANGE BLACK FOR BLUE LEADS FOR 208V OPERATION.
4. CONTACTOR FACTORY WIRED. CONNECT FIELD WIRE TO FACTORY SUPPLIED CONTACTOR IN ELECTRICAL BOX.
5. LOW VOLTAGE CIRCUIT IS N.E.C. CLASS 2 WITH A CLASS 2 TRANSFORMER, 24V, 50/60 HZ SUPPLIED.
6. CONNECT FIELD WIRING IN GROUNDED RAIN TIGHT CONDUIT TO 60 HZ FUSED DISCONNECT.
7. ONLY ONE MRLC IS NEEDED ON THE 80,000 INPUT UNIT.
8. MOTOR FACTORY WIRED FOR CORRECT SPEED.
9. WIRES FROM PL2 (6 & 9) GO TO THE MIXED AIR SENSOR ON THE OPTIONAL ECONOMIZER.
10. Y2 IS USED ONLY FOR THE OPTIONAL ECONOMIZER.

WIRING INFORMATION

LINE VOLTAGE
- -FACTORY STANDARD
- -FACTORY OPTION
- -FIELD INSTALLED

LOW VOLTAGE
- -FACTORY STANDARD
- -FACTORY OPTION
- -FIELD INSTALLED

REPLACEMENT WIRE
- -MUST BE THE SAME SIZE AND TYPE OF INSULATION AS ORIGINAL (105 C.MIN.)

WARNING
- -CABINET MUST BE PERMANENTLY GROUNDED AND CONFORM TO I.E.C., N.E.C., C.E.C., NATIONAL WIRING REGULATIONS, AND LOCAL CODES AS APPLICABLE.

WIRE COLOR CODE

BK	BLACK	O	ORANGE
BR	BROWN	PR	PURPLE
BL	BLUE	R	RED
G	GREEN	W	WHITE
GY	GRAY	Y	YELLOW

ELECTRICAL WIRING DIAGRAM

208 / 230, 1 PHASE DIRECT DRIVE w/ X-MOTOR

DR. BY	APP. BY	DATE	DWG. NO.	REV
MGR		2-11-13	90-23596-38	01