


RXQJ-C10J

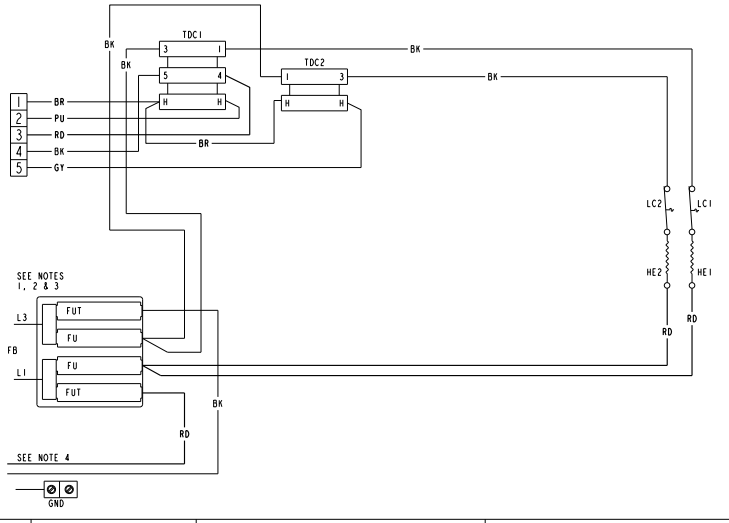

SCHEMATIC DIAGRAM



CONTROL



COMPONENT CODE

FB	FUSE BLOCK
FU	FUSE (ONE TIME)
FUT	FUSE W/TIME DELAY
GND	GROUND
HE	HEATER ELEMENT
LC	LIMIT CONTROL
PL	PLUG
TDC	TIME DELAY CONTROL

NOTES:

1. USE COPPER WIRE ONLY.
2. CONNECT FIELD WIRING IN GROUNDED RAINTIGHT CONDUIT TO 60 HZ SINGLE PHASE POWER.
3. SEE INSTALLATION INSTRUCTIONS FOR FIELD SIZING.
4. WIRE FACTORY CONNECTED FROM CONTACTOR IN UNIT CONTROL BOX.
5. REPLACEMENT FUSES SHOULD BE NONRENEWABLE CARTRIDGE TYPE, EQUIVALENT TO ORIGINAL.

FACTORY INSTALLED FUSES

HEATER KIT	UNIT
(2) ONE-TIME 60 AMP	(2) TIME DELAY 60 AMP

WIRING INFORMATION

LINE VOLTAGE
- FACTORY STANDARD ——————
- FACTORY OPTION —— – —— – ——
- FIELD INSTALLED —— —— ——

LOW VOLTAGE
- FACTORY STANDARD ——————
- FACTORY OPTION —— – —— – ——
- FIELD INSTALLED —— —— ——

REPLACEMENT WIRE MUST BE THE SAME SIZE AND TYPE OF INSULATION AS ORIGINAL (105°C MIN.)

WARNING - CABINET MUST BE PERMANENTLY GROUNDED AND CONFORM TO I.E.C., N.E.C., C.E.C. AND LOCAL CODES AS APPLICABLE.

WIRE COLOR CODE

BK	BLACK	GR	GREEN	RD	RED	GY	GRAY
BR	BROWN	OR	ORANGE	WH	WHITE		
BL	BLUE	PU	PURPLE	YL	YELLOW		

ELECTRICAL WIRING DIAGRAM
9.6 KW
208-240 VOLT, 60 HZ
SINGLE PHASE

DR. BY	APP. BY	DATE	DWG. NO.	REV
				01